
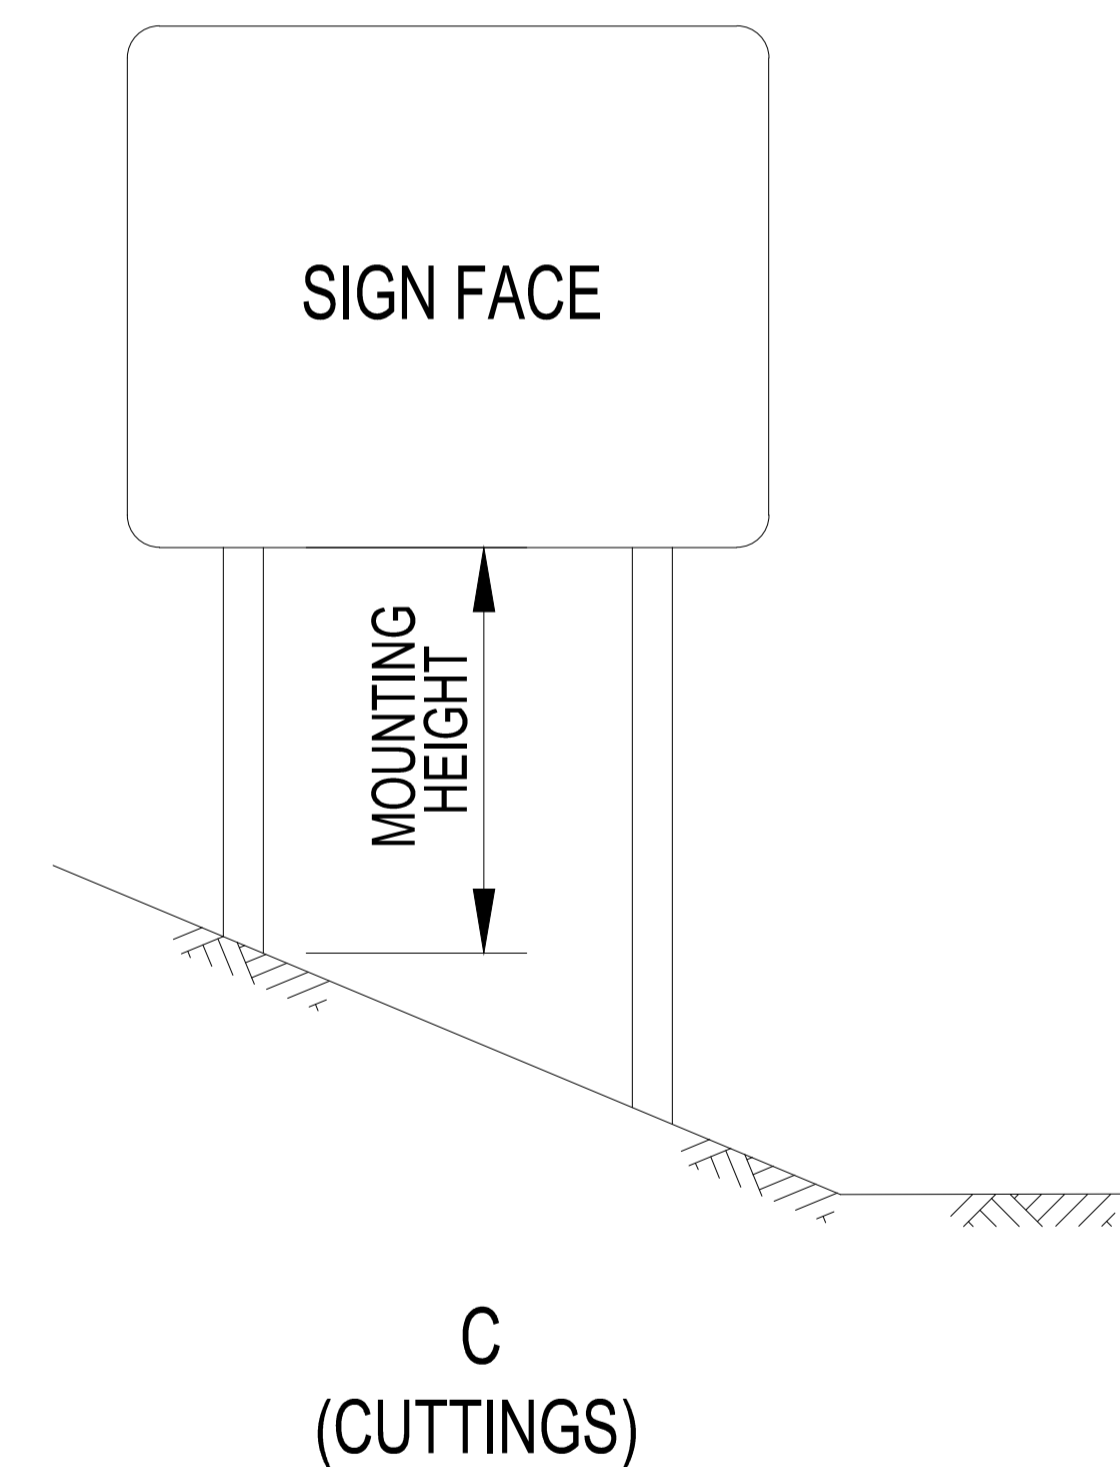
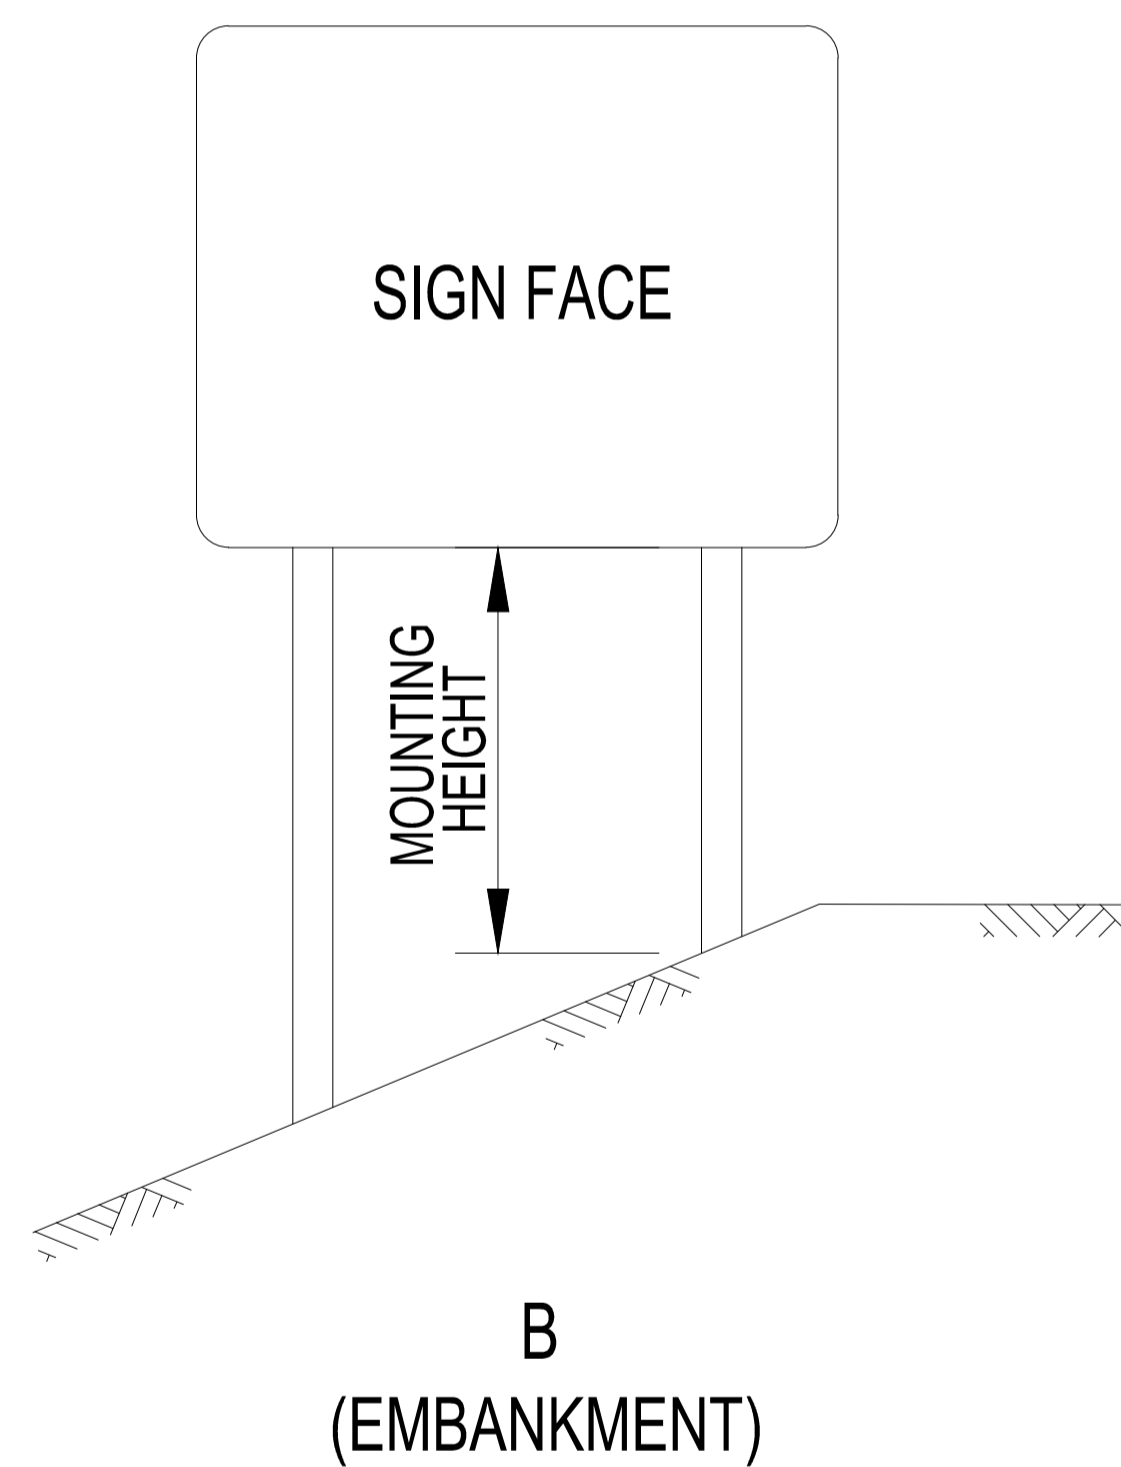


1. Where large signs are to be assembled on site from separate panels, such panels shall be stiffened using channel section so that joints are lapped and strapped as shown.
2. Straps to be spaced not more than 600mm centres.
3. Where vertical stiffeners cross purlins correct locking bolts, recommended by the manufacture, must be used.

**JOINING AND STRAPPING  
DETAILS FOR LARGE SIGN**

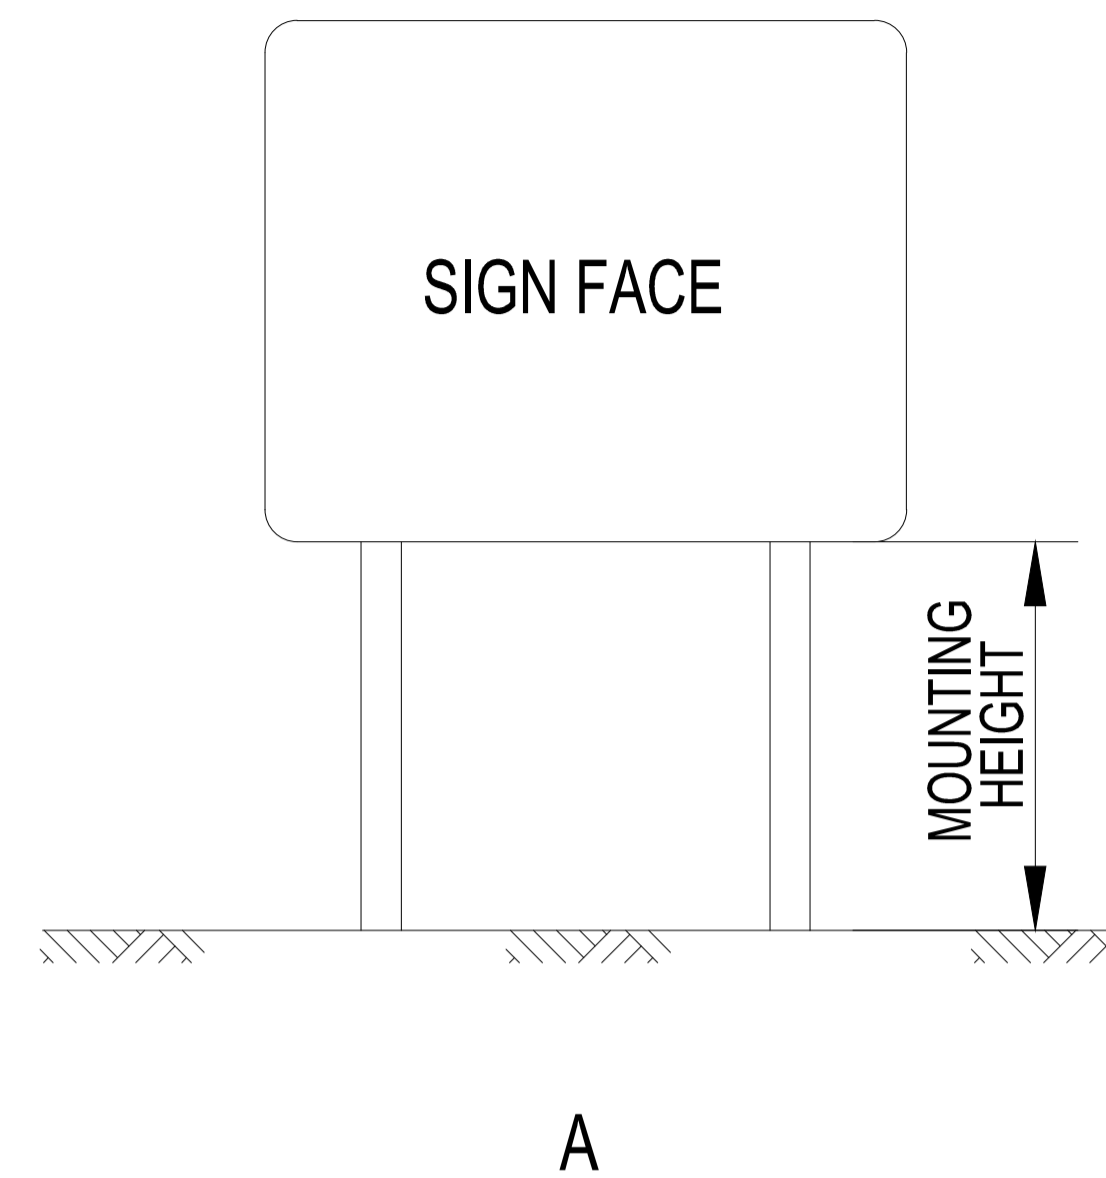

Notes

A	Various drawing revisions	AS	RC	DOK	06/21
	Description	Dwn	Chk	App	Date

IWP No.					N/A				
	CAD	Drawn	Checked	Approved	Project Title				
Initials	PB	PB	ADS	PW	HCC STANDARD DETAIL DRAWINGS				
Date	07/11	07/11	07/11	07/11	Drawing Title				
Sht No.	1 OF 1				SIGN MOUNTING DEATILS				
Scales	NTS								

Drg. No.		HST-1200-0008		Rev.		A	
----------	--	---------------	--	------	--	---	--



COUNTY HALL  
Pegs Lane  
Hertford, Herts  
SG13 8DN  
Phone: 01992 555555