



ALL DIMENSIONS ARE IN MILLIMETRES
UNLESS OTHERWISE STATED

Notes

- On existing footways, where shallow services are encountered on site, the brickwork may be omitted from the gully construction and alternative hinged gully cover used, subject to approval of the *Project Manager*. In extreme cases the bottom section of the gully pot may be cut on diameter 'x'-x' and suitably bedded in the in situ concrete base.

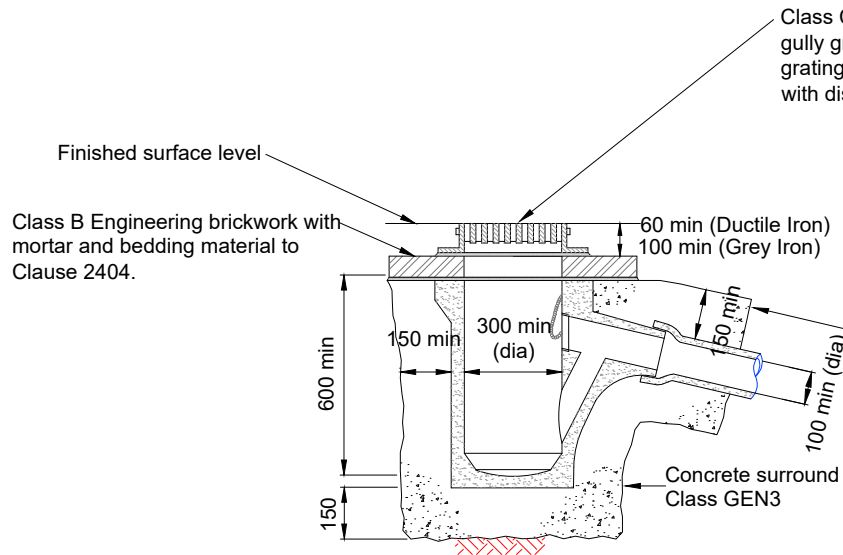

PRECAST CONCRETE
(NEW FOOTWAY CONSTRUCTION)

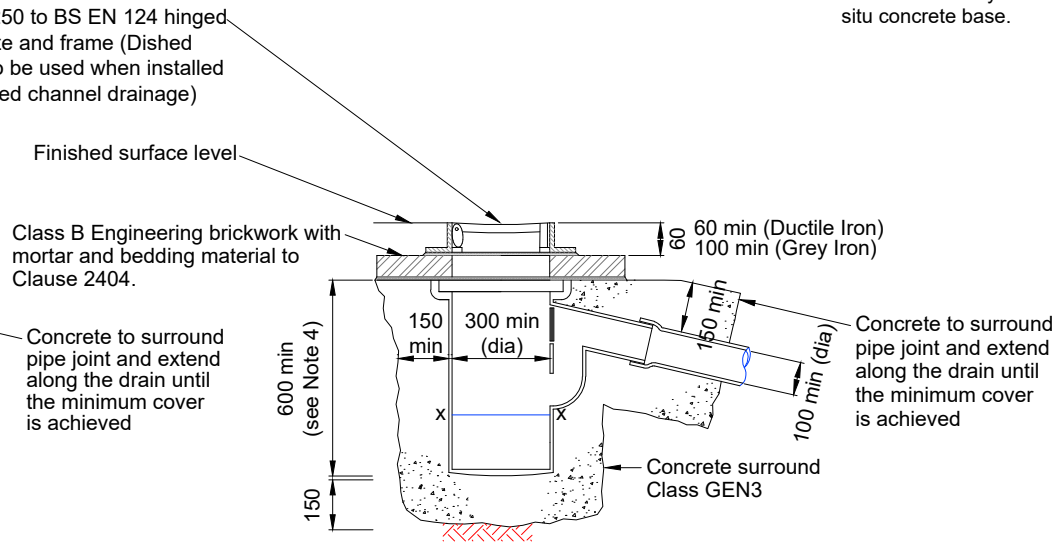

PRE-FORMED PLASTIC
(NEW AND EXISTING FOOTWAYS)



COUNTY HALL
Pegs Lane
Hertford, Herts
SG13 8DN
Phone: 01992 555555

Revisions

- A - AUG 23 UPDATED DETAIL
B -
C -

Drawing Title

TRAPPED FOOTWAY GULLIES

Dwg No: HST/500/005

Scale at A4 : N.T.S.

Drawn	Approved	Revised
TJ	JE	
Checked	Date	Date
STM	JULY '11	