
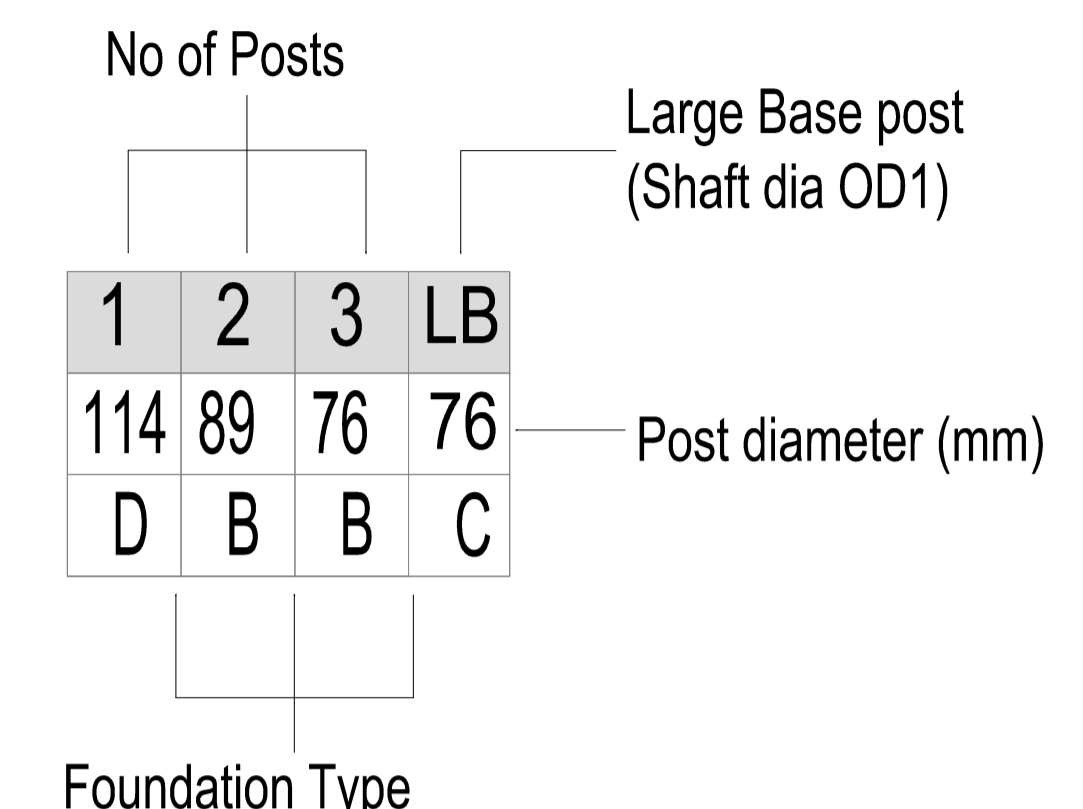



Hc (m)	Area of Sign (s) m <sup>2</sup>												Hc (m)
	Up to 0.25	0.26 - 0.5	0.51 - 0.75	0.76 - 1.0	1.01 - 1.25	1.26 - 1.50	1.51 - 1.75	1.76 - 2.0	2.01 - 2.25	2.26 - 2.5	2.51 - 2.75	2.76 - 3.0	
4.26 - 4.5	1 2 3 LB 114 - - 76 C - - C	1 2 3 LB 114 76 - 89 C C - C	1 2 3 LB 114 89 - 114 C C - C	1 2 3 LB 140 114 - 114 D C - D	1 2 3 LB 140 114 - 114 E D - E	1 2 3 LB 140 114 - 140 E D - E	1 2 3 LB 140 114 - 140 F D - F	1 2 3 LB 140 140 114 140 F D D F	1 2 3 LB 168 140 114 140 F D D F	1 2 3 LB 168 140 114 140 F E D F	1 2 3 LB 168 140 114 - G E D -	1 2 3 LB 194 140 140 - G E D -	4.01 - 4.25
3.76 - 4.0	1 2 3 LB 76 - - 76 B - - B	1 2 3 LB 89 76 - 76 C B - C	1 2 3 LB 114 89 - 89 C C - C	1 2 3 LB 114 89 - 114 D C - D	1 2 3 LB 140 114 - 114 D C - D	1 2 3 LB 140 114 - 140 E C - E	1 2 3 LB 140 114 144 140 F D C F	1 2 3 LB 140 140 114 140 F D C F	1 2 3 LB 168 140 114 140 F D D F	1 2 3 LB 168 140 114 140 F D D F	1 2 3 LB 168 140 114 140 G E D G	1 2 3 LB 168 140 114 140 G E D -	3.51 - 3.75
3.26 - 3.5	1 2 3 LB 76 - - 76 A - - A	1 2 3 LB 89 76 - 76 C B - C	1 2 3 LB 114 76 - 89 C B - C	1 2 3 LB 114 89 - 114 D C - C	1 2 3 LB 140 114 - 114 D C - D	1 2 3 LB 140 114 - 114 D C - D	1 2 3 LB 140 114 89 140 E C E	1 2 3 LB 140 114 114 140 F D C F	1 2 3 LB 140 114 114 140 F D C F	1 2 3 LB 168 140 114 140 F D C F	1 2 3 LB 168 140 114 140 F D C F	1 2 3 LB 168 140 114 140 F D D E	3.01 - 3.25
2.76 - 3.0	1 2 3 LB 76 - - 76 A - - A	1 2 3 LB 76 76 - 76 B A - B	1 2 3 LB 114 76 - 76 C B - C	1 2 3 LB 114 76 - 89 C B - C	1 2 3 LB 140 89 - 114 D C - D	1 2 3 LB 140 114 - 114 D C - D	1 2 3 LB 140 114 89 114 E C C E	1 2 3 LB 140 114 89 140 E D C E	1 2 3 LB 140 114 114 140 E D C E	1 2 3 LB 140 114 114 140 F D C F	1 2 3 LB 140 114 114 140 F D C F	1 2 3 LB 140 140 114 140 F D C D	2.76 - 3.0

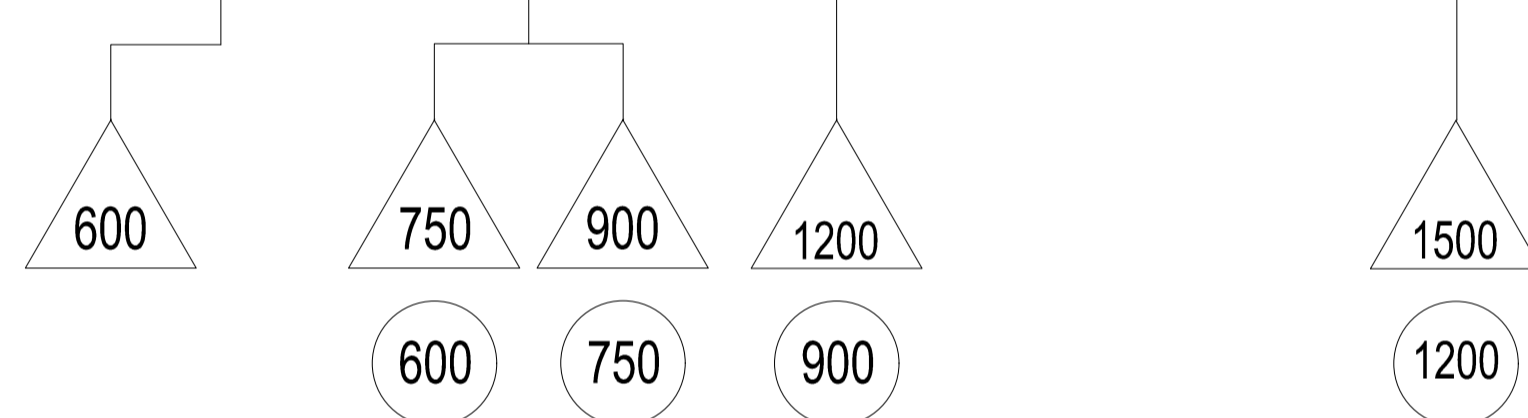

Post sockets are to be 25mm to 70mm greater diameter than the proposed post and the void filled with 3mm grit or kiln dried sharp sand up to 100mm from the top of the socket. The top 100mm is to be filled with rapid set cement mortar. Sockets may be fabricated from PVC, MDPE, concrete or earthenware

FOUNDAT'N TYPE	A	B	C	D	E	F	G	H	I
LENGTH L (mm)	450	700	800	1000	900	1300	1200	1800	1800
WIDTH W (mm)	450	500	500	500	500	500	600	600	600
DEPTH D (mm)	600	600	700	800	900	900	1000	1000	1200

ALL DIMENSIONS ARE MINIMUM REQUIREMENT, THUS LENGTH OF FOUNDATION CAN BE INCREASED TO SUIT MORE THAN ONE POSTS ARRANGEMENT

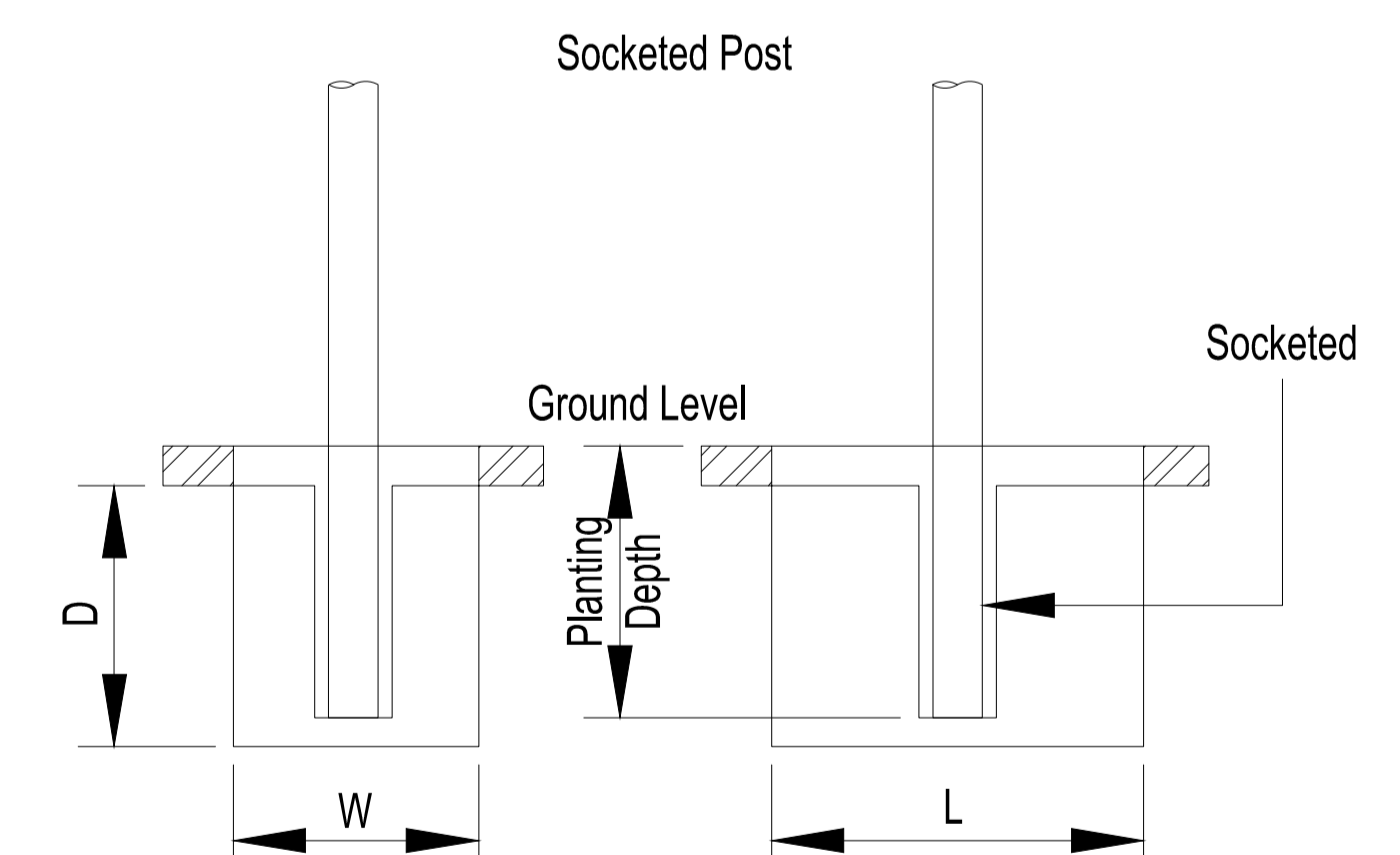

Notes

A	Various drawing revisions	AS	RC	DOK	06/21
	Description	Dwn	Chk	App	Date

IWP No.	N/A				Drg. No.	HST-1200-0005		Rev.	A
	CAD	Drawn	Checked	Approved	Project Title				
	JLE	JLE	SLR	ADS	HCC STANDARD DETAIL DRAWINGS				
	Date	07/11	07/11	07/11	Drawing Title				
					POST & FOUNDATION SIZES FOR SIGN UP TO 3m2 (PART 2)				
Sht No.	1 OF 1								
Scales	NTS								

Project Title					HCC STANDARD DETAIL DRAWINGS				
Drawing Title					POST & FOUNDATION SIZES FOR SIGN UP TO 3m2 (PART 2)				

