


Area of Sign (s) m<sup>2</sup>

Hc (m)	3.01 - 3.5		3.51 - 4.0		4.01 - 4.5		4.51 - 5.0		5.01 - 5.5		5.51 - 6.0		6.01 - 6.5		6.51 - 7.0		7.01 - 7.5		7.51 - 8.0		8.01 - 8.5		8.51 - 9.0		Hc (m)																								
	1	2	3	LB	1	2	3	LB	1	2	3	LB	1	2	3	LB	1	2	3	LB	1	2	3	LB		1	2	3	LB	1	2	3	LB	1	2	3	LB	1	2	3	LB	1	2	3	LB	1	2	3	LB
4.26 - 4.5	194	140	140	-	194	140	140	-	219	168	140	-	219	168	140	-	244	194	140	-	244	194	168	-	244	194	168	-	244	194	168	-	273	194	168	-	273	219	168	-	4.26 - 4.5								
4.01 - 4.25	194	140	140	-	194	140	140	-	194	168	140	-	219	168	140	-	219	168	140	-	244	194	168	-	244	194	168	-	244	194	168	-	244	194	168	-	244	194	168	-	273	194	168	-	273	194	168	-	4.01 - 4.25
3.76 - 4.0	194	140	140	-	194	140	140	-	194	140	140	-	219	168	140	-	219	168	140	-	219	168	140	-	244	194	168	-	244	194	168	-	244	194	168	-	244	194	168	-	244	194	168	-	244	194	168	-	3.76 - 4.0
3.51 - 3.75	168	140	114	-	194	140	140	-	194	140	140	-	194	168	140	-	219	168	140	-	219	168	140	-	219	168	140	-	244	168	140	-	244	194	168	-	244	194	168	-	244	194	168	-	244	194	168	-	3.51 - 3.75
3.26 - 3.5	168	140	114	140	194	140	140	-	194	140	140	-	194	140	140	-	194	168	140	-	219	168	140	-	219	168	140	-	219	168	140	-	244	168	140	-	244	194	168	-	244	194	168	-	244	194	168	-	3.26 - 3.5
3.01 - 3.25	168	140	114	140	168	140	114	140	194	140	140	-	194	140	140	-	194	168	140	-	219	168	140	-	219	168	140	-	219	168	140	-	244	168	140	-	244	194	168	-	244	194	168	-	244	194	168	-	3.01 - 3.25
2.76 - 3.0	168	140	114	140	168	140	114	140	194	140	140	140	194	140	140	-	194	140	140	-	194	168	140	-	219	168	140	-	219	168	140	-	219	168	140	-	219	168	140	-	219	168	140	-	244	194	140	-	2.76 - 3.0
	3.01 - 3.5		3.51 - 4.0		4.01 - 4.5		4.51 - 5.0		5.01 - 5.5		5.51 - 6.0		6.01 - 6.5		6.51 - 7.0		7.01 - 7.5		7.51 - 8.0		8.01 - 8.5		8.51 - 9.0																										


Area of Sign (s) m<sup>2</sup>

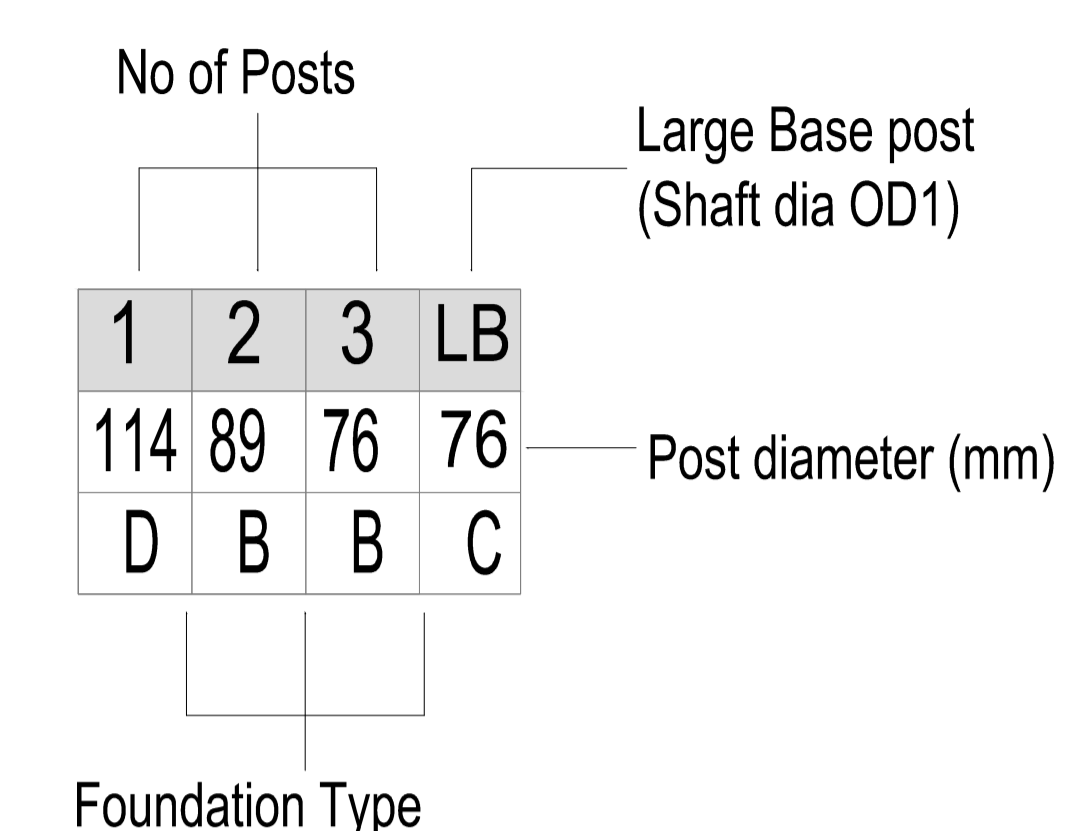

Post sockets are to be 25mm to 70mm greater diameter than the proposed post and the void filled with 3mm grit or kiln dried sharp sand up to 100mm from the top of the socket. The top 100mm is to be filled with rapid set cement mortar. Sockets may be fabricated from PVC, MDPE, concrete or earthenware

FOUNDAT'N TYPE	A	B	C	D	E	F	G	H	I
LENGTH L (mm)	450	700	800	1000	900	1300	1200	1800	1800
WIDTH W (mm)	450	500	500	500	500	500	600	600	600
DEPTH D (mm)	600	600	700	800	900	900	1000	1000	1200

ALL DIMENSIONS ARE MINIMUM REQUIREMENT, THUS LENGTH OF FOUNDATION CAN BE INCREASED TO SUIT MORE THAN ONE POSTS ARRANGEMENT

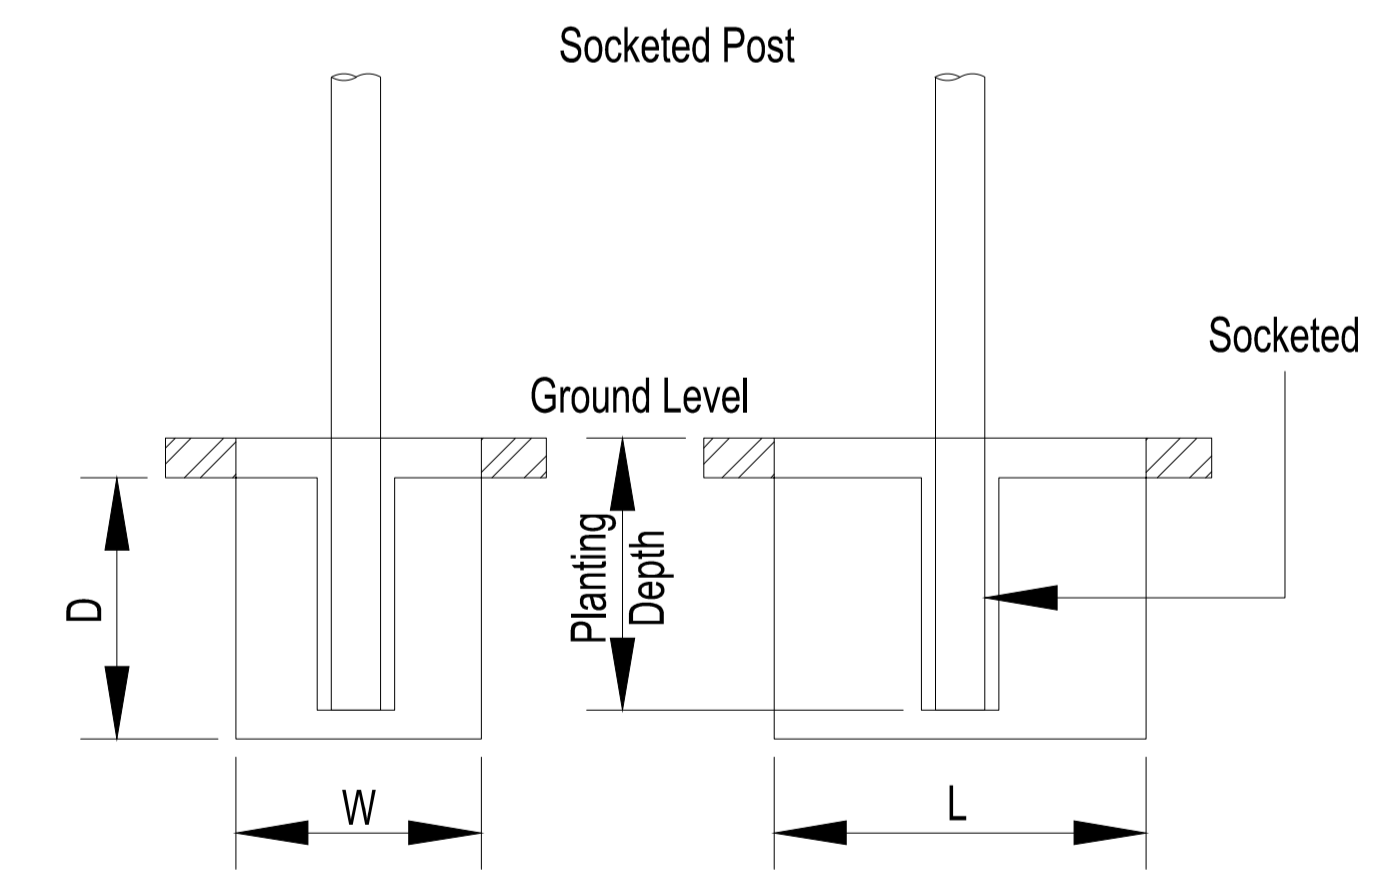

Notes					IWP No. N/A				Drg. No. HST-1200-0007				Rev. A	
					CAD Drawn Checked Approved				Project Title				HCC STANDARD DETAIL DRAWINGS	
					Initials JLE JLE SLR ADS				Date 07/11 07/11 07/11 07/11					
					Sht No. 1 OF 1				Drawing Title					
					Scales				POST & FOUNDATION SIZES FOR SIGN UP TO 3m2 TO 9m2(PART 2)					
A Various drawing revisions				SJR RC DOK 06/21										
Description				Dwn Chk App Date										

